

# MURAL CLUB

gerflor.com



**Gerflor**<sup>®</sup>  
theflooringgroup

# MURAL CLUB

 Compact sheet	B-s2,d0	PUR	 100% recyclable
--	---------	-----	---



0003 Sand



0006 Grey



0001 White



0007 Blue



0004 Green



0005 Yellow

# MURAL CLUB



## TECHNICAL PERFORMANCES

- Resistance to tearing
- Fire classification according to EN 13501: **B-s2,d0**



## HYGIENE

- Smooth and washable surface
- No particle emission
- Reduces hospital acquired infections compliant with ISO 22196, inhibits growth of bacteria
- Good resistance to staining thanks to **PUR surface treatment**



## AESTHETICS

- Slightly marbled design in 6 soft colours
- Colours matching the Gerflor ranges especially the Mipolam ranges




## INSTALLATION

- Horizontal or vertical installation (2m width)
- Coloured backing for a perfect welding aspect
- A complete range of accessories for a durable and easy installation



## ECO-FRIENDLY

- 100% recyclable
- Contains recycled production wastes
- Raw materials 100% compliant with Reach

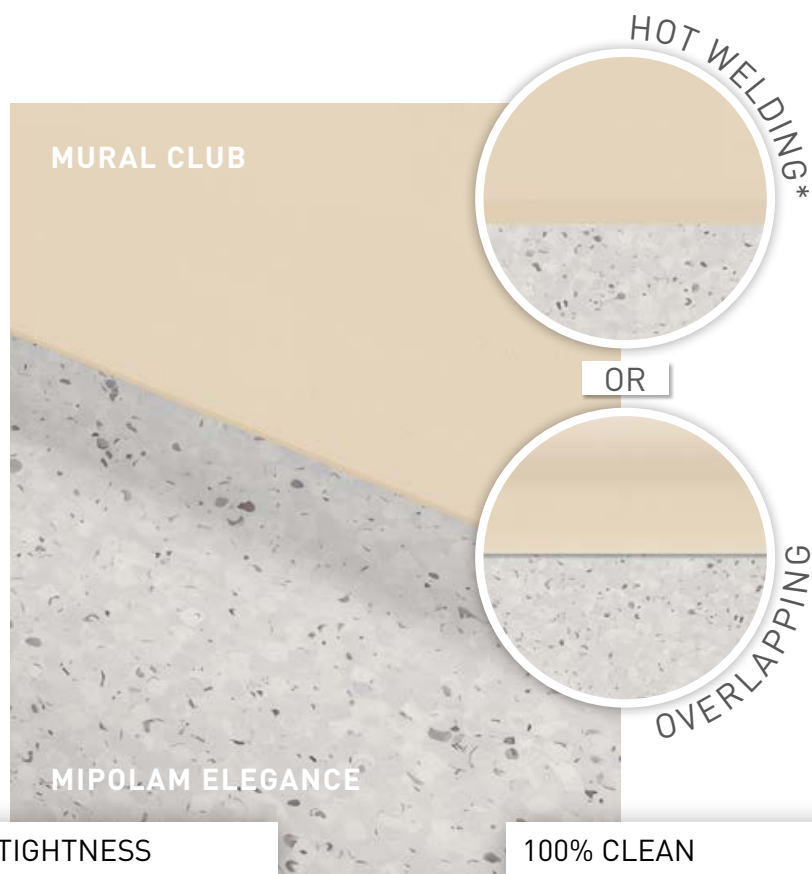

### 100% WATERTIGHTNESS

- ▶ **NO CONTAMINATION** areas between floor and wall protection
- ▶ **HOT WELDED\*** for perfect sealing avoiding bacteria development

### 100% CLEAN

- ▶ Open angles for **PERFECT CLEANING** (mechanical and manual)

**MURAL CLUB** is a homogeneous wall covering in 2m width roll and with a **B-s2,d0** fire classification. It is designed to be a permanent wall covering.

It is hot welded with CR40 welding rods for better hygiene.

It is made of calendered layer with colour throughout the whole thickness for a nicer aspect of the welding. This layer comprises at least 10% of recycled products. It does not contain any CMR 1 & 2 component and is 100% compliant with REACH. It is 100% recyclable.

**MURAL CLUB** benefits from a **PUR surface treatment** which provided good resistance to chemical products and makes maintenance easier.

Full resistant to impact, it acts as a buffer against damage from beds, trolleys and indoor motorized vehicles and other transportation systems.

**MURAL CLUB** is fully impact resistant and is therefore ideal for use as a cladding in large public buildings such as hospitals care institutions dental and veterinary surgeries, clean rooms, stores and supermarkets, warehouse and storage areas.

## MURAL CLUB

### DESCRIPTION / BESCHREIBUNG / DESCRIPTION / BESCHRIJVING / DESCRIPCIÓN / DESCRICÃO / DESCRIZIONE

Total thickness / <i>Gesamtdicke</i> / Epaisseur totale / <i>Totale dikte</i> / Espesor total / <i>Espessura total</i> / Spessore totale	EN ISO 24346 (EN 428)	mm	1.0
Thickness of wearlayer / <i>Dicke Nutzschrift</i> / Epaisseur couche d'usure / <i>Dikte van de slijtlaag</i> / Espesor capa de uso / <i>Espessura camada de desgaste</i> / Spessore strato di usura	EN ISO 24340 (EN 429)	mm	1.0
Weight / <i>Flächengewicht</i> / Poids / <i>Gewicht</i> / Peso / <i>Peso</i> / Peso	EN ISO 23997 (EN 430)	g/m <sup>2</sup>	1780
Width/length of sheet / <i>Bahnenbreite/-länge</i> / Largeur/longueur des lés / <i>Rolbreedte/Rolengte</i> / Ancho/largo de rollos / <i>Largura/comprimento dos rolos</i> / Larghezza/lunghezza dei teli	EN ISO 24341 (EN 426)	cm / ml	200 / 30

### CLASSIFICATION / KLASSIFIZIERUNG / CLASSIFICATION / CLASSIFICATIE / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI

Norm/product specification / <i>Produkt Norm</i> / Norme produit / <i>Technische eigenschappen</i> / Normas / <i>Normas</i> / Norma prodotto	-	-	EN 15 102
Fire rating / <i>Brandverhalten</i> / Classement feu / <i>Brand classificatie</i> / Fuego / <i>Fogo</i> / Reazione al fuoco	EN 13 501-1	class	B-s2,d0

### PERFORMANCES / TECHNISCHE EIGENSCHAFTEN / PERFORMANCES / TESTRESULTAAT / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE

Colour fastness / <i>Lichtechtheit</i> / Solidité lumière / <i>Lichtechtheid</i> / Resistencia a la luz / <i>Estabilidade das cores</i> / Solidità alla luce	EN 20 105 - B02	degree	≥ 6
Surface treatment / <i>Oberflächenvergütung</i> / Traitement de surface / <i>Oppervlaktebehandeling</i> / Tratamiento de superficie / <i>Tratamento de superficie</i> / Trattamento di superficie	-	-	PUR
Chemical resistance / <i>Verhalten gegenüber Chemikalien</i> / Résistance aux produits chimiques / <i>Chemische bestendigheid</i> / Resistencia a los productos químicos / <i>Resistência aos produtos químicos</i> / Resistenza ai prodotti chimici	EN ISO 26987 (EN 423)	-	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) / <i>Antibakterielle Aktivität</i> (E. coli - S. aureus - MRSA) / <i>Activité anti-bactérienne</i> (E. coli - S. aureus - MRSA) / <i>Antibacteriële activiteiten</i> (E. coli - S. aureus - MRSA) / <i>Actividad antibacteriana</i> (E. coli - S. aureus - MRSA) / <i>Atividade antibacteriana</i> (E. coli - S. aureus - MRSA) / <i>Azione antibatterica</i> (E. coli - S. aureus - MRSA) <sup>(1)</sup>	ISO 22196	-	> 99% inhibits growth / > 99% <i>Wachstumshemmend</i> / > 99% ne favorise pas la prolifération / > 99% <i>remt de groei van bacteriën</i> / > 99% inibe el crecimiento / > 99% <i>inibe o desenvolvimento</i> / > 99% inibisce la crescita

### CE MARKING / CE KENNZEICHNUNG / MARQUAGE CE / EG-CONFORMITEITSMERK / MARCA DE CONFORMIDAD CE / MARCA DE CONFORMIDADE CE / MARCATURA CE DI CONFORMITA

	EN 15 102	-	OK
--	-----------	---	----

(1) The implementation of an effective cleaning regime is the most important defence against infection.

### Gerflor Don't forget our complementary ranges!



### Be connected!



#Gerflor



www.gerflor.com

## GERFLOR, ACTIONS SPEAK LOUDER THAN WORDS



**COMPOSITION**  
100% REACH  
FREE of formaldehyde



**RECYCLED CONTENT**  
25%  
100% REACH compliant  
recycled content



**RECYCLABILITY**  
100% recyclable



**INDOOR AIR QUALITY**  
TVOC emissions between  
10 and 100 times better than  
norms requirements  
Floorscore certified  
No formaldehyde emission



**INSTALLATION**  
Adhesive free  
installation systems



**LCA**  
- Eco-designed according to a  
product specific Life Cycle Analysis  
- Product specific EPD  
(Environmental Products  
Declaration)



**WELLNESS**  
Health: Antibacterial activity  
(inhibits growth > 99%)  
Safety: Anti slip performance  
Comfort: Walking comfort  
and impact noise reduction