

TARALAY INITIAL

[gerflor.com](https://www.gerflor.com)



Gerflor[®]
theflooringgroup





TARALAY INITIAL



High performance indentation / acoustic:

- Compact: 0,03mm / 6 dB
- Comfort: 0,10mm / 19 dB



Easy maintenance:

Protecsol® Surface Treatment reduces cost and time of cleaning - no wax



All references are available in compact and comfort




Comfort and Safety:

High Density foam backing for walking comfort and fall absorption







TARALAY INITIAL

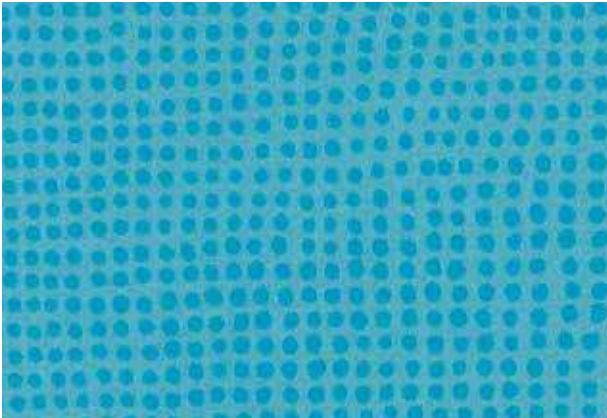

0825 - Diversion Turquoise
NCS: 2050-B20G / LRV: 30.5

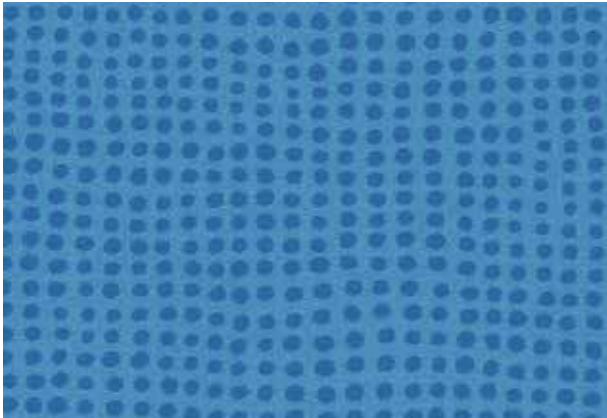


0597 - Diversion Atlantique
NCS: 3050-R90B / LRV: 21.4

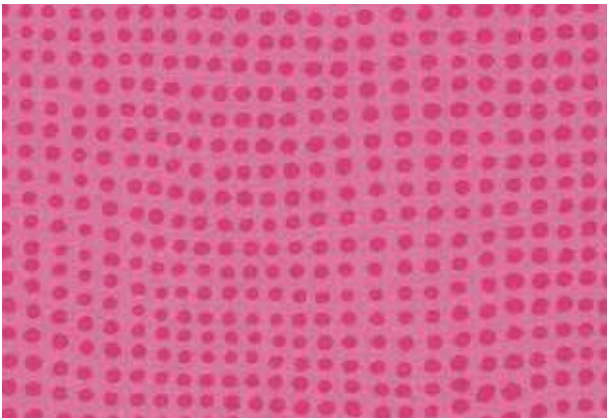

0599 - Diversion Rose
NCS: 2050-R20B / LRV: 23.5



0516 - Diversion Bordeaux
NCS: 4040-R20B / LRV: 10.8

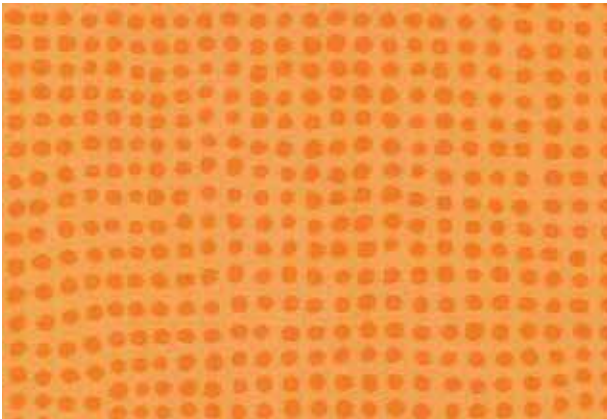

0600 - Diversion Clementine
NCS: 1080-Y40 / LRV: 36.3



0595 - Diversion Grenade
NCS: 2070-Y90R / LRV: 17



0515 - Diversion Kiwi
NCS: 2050-G70Y / LRV: 45



0596 - Diversion Mimosa
NCS: 1060-Y20R / LRV: 56.2




0823 - Tweedy Beige
NCS: 3005-Y50R / LRV: 44.9



0545 - Tweedy Natural
NCS: 2502-Y / LRV: 45.2



0822 - Tweedy Taupe
NCS: 6005-Y20R / LRV: 17.5

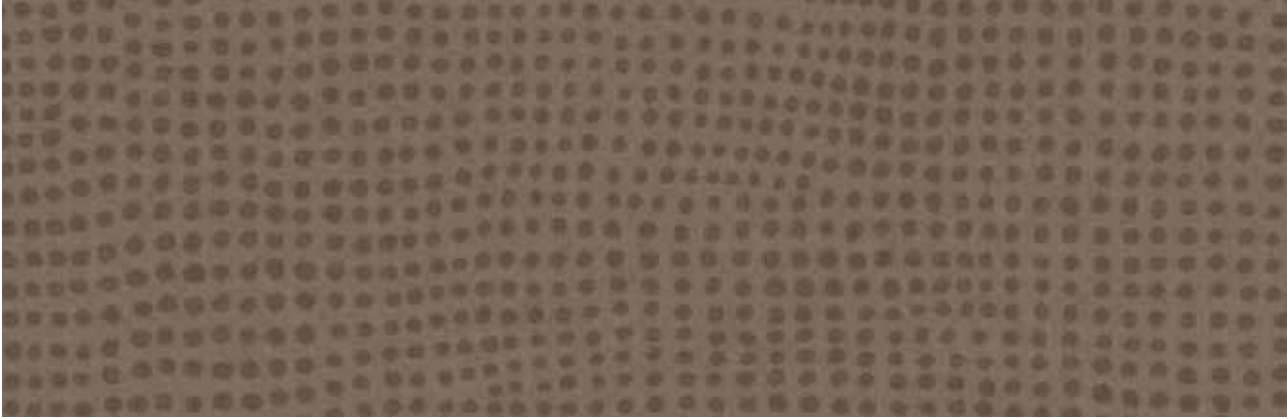

0049 - Diversion Carbone
NCS: 6005-Y50R / LRV: 13.7



0824 - Diversion Souris
NCS: 3502-B / LRV: 36.7



0047 - Diversion Ivoire
NCS: 1502-Y / LRV: 60.7

TARALAY INITIAL



No strip
Continuous
design

0829 - Filament Cream
NCS: 2005-Y20R / LRV: 50.3



16.6 cm

0797 - Habana Ivory
NCS: 2005-Y50R / LRV: 52.7



16.6 cm

0828 - Habana Beige
NCS: 4010-Y30R / LRV: 35.8



16.6 cm

0588 - Noma Clair
NCS: 3005-Y50R / LRV: 36.5

Comfort version 




No strip
Continuous
design

0024 - Renzo Chamois
NCS: 3020-Y30R / LRV: 35

Compact version 




6.2 cm

0779 - Ottawa Poplar
NCS: 2030 - Y30R / LRV: 40




10 cm

0636 - Esterel Blond
NCS: 5030-Y40R / LRV: 25.6




16.6 cm

0589 - Noma Marron
NCS: 5010 - Y50R / LRV: 22.1

TARALAY INITIAL



No strip
Continuous
design

0590 - Renzo Steel
NCS: 6500 / LRV: 14.5



No strip
Continuous
design

0826 - Filament Grey
NCS: 3500-N / LRV: 39.4




10 cm



No strip
Continuous
design

0518 - Esterel Chocolate
NCS: 6005-Y50R / LRV: 16.3

0799 - Filament Light
NCS: 4005-Y20R / LRV: 31.7

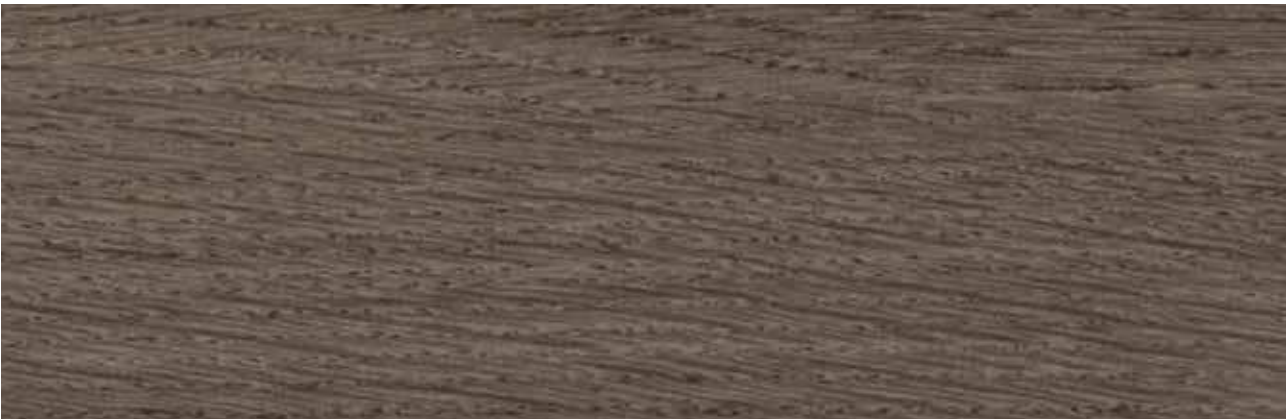


No strip
Continuous
design

0069 - Renzo Noisette
NCS: 7010 - Y30R / LRV: 14.2



0037 - Urban Souris
NCS: 3502-R / LRV: 34.8

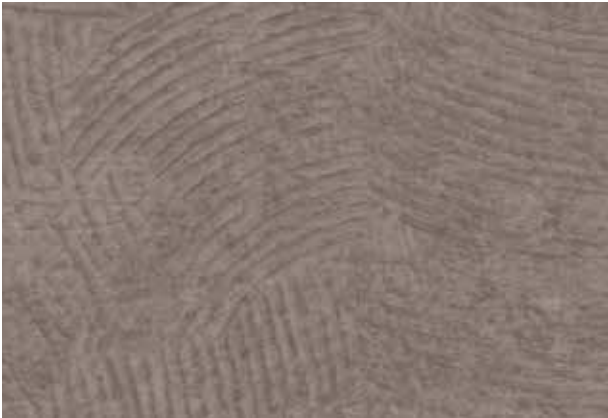


0035 - Urban Gris
NCS: 5502-R / LRV: 24.1



0465 - Strada Ciment
NCS: 4502-R / LRV: 25.7



0791 - Strada Metallic
NCS: 5005-Y20R / LRV: 22.3

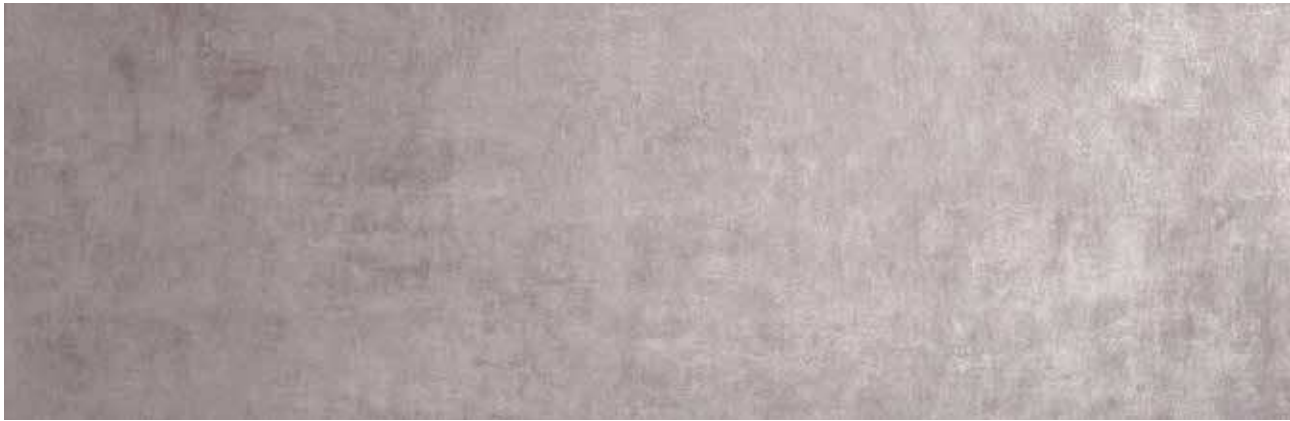

0790 - Strada Chrome
NCS: 3500-N / LRV: 21.4

		TARALAY INITIAL COMPACT PRO		TARALAY INITIAL COMFORT PRO	
DESCRIPTION					
Total thickness	EN ISO 24346 [EN 428]	mm	2.00	3.35	
	ASTM F386-02	inch	0.08	0.13	
Wearlayer thickness	EN ISO 24340 [EN 429]	mm	0.70	0.65	
	ASTM F410-02	inch	0.028	0.026	
Weight	EN ISO 23997 [EN 430]	g/sq.m	2635	2825	
Width/length of sheet	EN ISO 24341 [EN 426]	cm / lm	200 / 25	200 / 25	
	-	feet - inch	6'6" / 82'	6'6" / 82'	
CLASSIFICATION					
Norm/product specification	-	-	EN ISO 10582 [EN 649]	EN 651	
European classification	EN ISO 10874 [EN 685]	class	34 - 43	34 - 42	
Fire rating	EN 13 501-1	class	Bfl-s1	Bfl-s1	
Static electrical propensity	EN 1815	kV	< 2	< 2	
Slip resistance wet: ramp test with oil ^[1]	DIN 51 130	class	R10	R10	
PERFORMANCES					
Wear resistance	EN 660.2	mm³	≤ 2.0	≤ 2.0	
Wear group	NF 189	group	T	T	
Type binder content	EN ISO 10582	Type	I	-	
Dimensional stability	EN ISO 23999 [EN 434]	%	≤ 0.40	≤ 0.40	
Residual indentation (requirement)	EN ISO 24343-1 [EN 433]	mm	≤ 0.10	≤ 0.20	
Residual indentation (average measured value)	-	mm	ca. 0.03	0.10	
Impact sound insulation	EN ISO 717-2	dB	6	19	
Castor chair test (type W)	ISO 4918 [EN 425]	-	OK	OK	
Thermal conductivity	EN ISO 10456 [EN 12524]	W/[m.K]	0.25	0.25	
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	
Surface treatment	-	-	ProtecSol®	ProtecSol®	
Chemical products resistance	EN ISO 26987 [EN 423]	-	OK	OK	
Anti-bacterial activity [E. coli - S. aureus - MRSA] ^[2]	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	
ENVIRONMENT / INDOOR QUALITY AIR					
TVOC after 28 days	ISO 16000-6	µg/m³	< 10	< 10	
Certification	-	-	Floorscore®	Floorscore®	
CE marking					
CE	EN 14041	-			
		-			

[1] For lifetime sustainable wet resistance, please refer to Tarasafe ranges
[2] The implementation of an effective cleaning regime is the best defence against infection

IMPORTANT: The information contained in this document is valid from 01/09/2017 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

Product description and technical data sheet available in various languages. See our Gerflor Country websites.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

TARALAY INITIAL, LESS SPEAKING FOR MORE ACTIONS

COMPOSITION
100% REACH

INDOOR AIR QUALITY
100 times lower than norms requirements
(TVOC < 10 ug/m³ after 28 days)

RECYCLABILITY
100%

LCA
Eco-designed according to a product specific life cycle analysis

WELLNESS
Anti slip R10
Comfort version : Walking comfort < 65 dB (best certification) and impact sound insulation - 19dB

Be connected!

#Gerflor